



### CASE 1 - CONFORM TO HIGH CROWN OF PAVEMENT

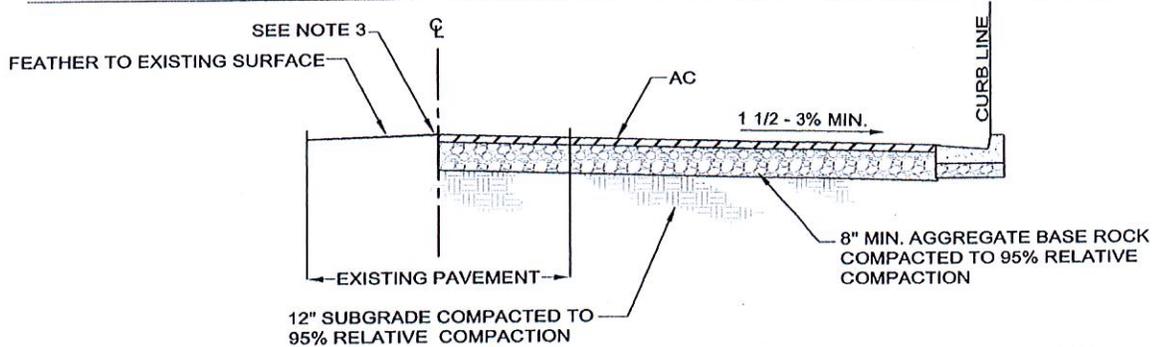

### CASE 2 - CONFORM TO CROWN OF PAVEMENT

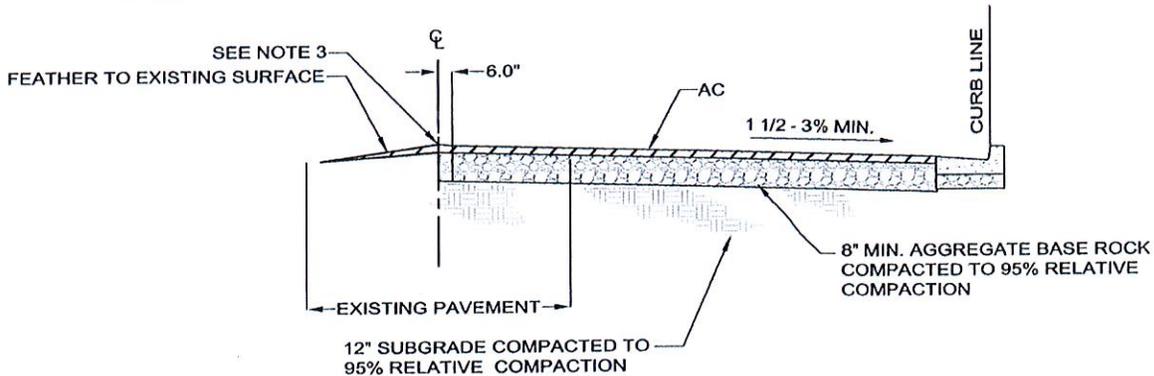

### CASE 3 - CONFORM TO LOW CROWN OF PAVEMENT

**NOTES:**

1. ASPHALT CONCRETE CLASS AND GRADE SHALL BE AS FOLLOWS:
  - ASPHALT PAVEMENT LESS THAN 2" IS NOT PERMITTED.
  - C2-PG 64-10 FOR ASPHALT PAVEMENT THICKNESS GREATER THAN 2" AND LESS THAN 3".
  - TWO COURSES OF PAVING IS REQUIRED FOR ALL SECTIONS 3" OR GREATER IN WHICH THE FINISH COURSE SHALL BE C2-PG 64-10 AND ALL OTHER COURSES SHALL BE CLASS B-PG 64-10.
2. PRE-SATURATE AGGREGATE BASE ROCK AND MAINTAIN 24 HOUR PERIOD PRIOR TO ASPHALT CONCRETE PLACEMENT.
3. IF GRINDING CAN NOT PRODUCE FIRM EDGE, SAW CUTTING WILL BE REQUIRED.

TITLE: **PAVEMENT CONFORMANCE (TYPICAL)**

DRAWN BY: LOUIE C. GUEVARA  
 SCALE: NONE  
 REVIEWED BY: DAVID RUBCIC  
 REVISED: APRIL, 2013  
 CITY OF HOLLISTER  
 ENGINEERING DIVISION

APPROVED: *Rudi Golnik*  
 7-16-13  
 CITY ENGINEER: RUDI GOLNIK LIC. NO. 39570 EXP. DATE: 12-31-2013  
 DATE

STANDARD PLAN  
**A-5**  
 SHEET 1 OF 1