


PLAN

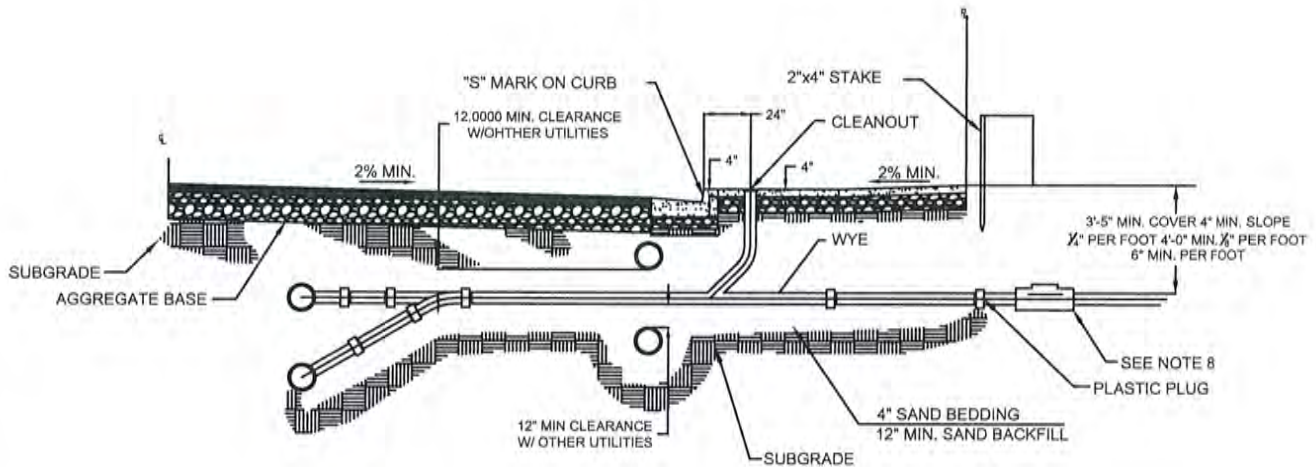

ELEVATION

**NOTES:**

1. SEWER LATERALS SHALL BE ABS (SCH. 40) OR PVC (SDR 26) ASTM D3035 PIPE.
2. STAMP OR CHISEL AN "S" ON THE FACE OF CURB AT LATERAL LOCATION.
3. A PRESSURE TREATED DOUGLAS FIRE STAKE SHALL BE INSTALLED AT EACH LATERAL TERMINUS. ALL STAKES SHALL BE PAINTED WHITE.
4. ALL SAND BACKFILL SHALL BE COMPACTED TO 90% RELATIVE COMPACTION.
5. ALL SEWER LATERALS SHALL PASS A LOW PRESSURE AIR AND MANDREL TEST PERFORMED AFTER COMPACTION & MAJORITY OF AGGREGATE BASE ROCK.
6. ALL SANITARY SEWER MAINS SHALL BE VIDEOED BY AND INDEPENDENT CONTRACTOR APPROVED BY CITY ENGINEER.
7. BEDDING & TRENCH BACKFILL REQUIREMENTS PER STANDARD PLAN E-3-1.
8. BACKFLOW PREVENTION DEVICE IS REQUIRED ON SEWER LATERALS WITH FULL CAPACITY SEWER MAINS AND SEWER LATERAL BELOW THE DOWNSTREAM INVERT ELEVATION OF SEWER MAINS. BACKFLOW PREVENTION DEVICE TO BE INSTALLED ON PRIVATE PROPERTY ONLY.

TITLE: <b>SEWER LATERAL &amp; CLEANOUT</b>			
DRAWN BY: STAFF	SCALE: NONE	APPROVED:	STANDARD PLAN
REVIEWED BY: DANNY HILLSTOCK	REVISED: OCTOBER, 2019	<i>Danny Hillstock</i> 11-5-19	<b>C-2-1</b>
CITY OF HOLLISTER ENGINEERING DEPARTMENT		CITY ENGINEER: DANNY HILLSTOCK LIC. NO. 70647	DATE
			SHEET 1 OF 2